

Dimmer, 2 x 230 W Output

smart-house

BH4-D230W2-230

Switching and dimming of lamps

8 control-channel receiver

Negative or positive phase angle dimming

For DIN-rail mounting

LED-indications for alarm, smart-house carrier and output

Lamp-protective soft-start function

Channel coding by BGP-COD-BAT

4 lighting scenes

Transmits the status of the dimming output

Protected against short-circuit and overload

Buttons on the front for manual control of the dimmer

Switch for selecting scenarios lock/unlock on the front

Output is shortcircuit /overload protected



OUTPUT SPECIFICATIONS

Outputs	2	
Dimming capacity	2 x 230 W	transformer, the load is typically 10% on the transformer and 90% on the lamps.
	Note: The 230 W is the total load on the output. If the installation uses a traditional transformer, the load is typically 30% on the transformer and 70% on the lamps. If the installation uses an electronic	Rated operational voltage 230 VAC $\pm 10\%$
		Dimming speed 3.6 s (5% - 100%)
		Response time 1 Cycle: ≤ 272 ms @ 128 channels)


GENERAL SPECIFICATIONS

Power ON delay	7 s	Housing	H4-housing
Indication for		Operating Device	Switch for selection of negative/positive phase angle control. Push button switch for turning output "ON/OFF" (one per output). Latching switch for entering scenario programming mode.
Supply On	LED, Green		
Alarm	LED, Red – Flashing Slow flashing: Overload Fast flashing: Short circuit		
smart-house carrier	LED, Yellow		
Output On	LED, Red (one per output)		
Environment		Standards	IEC 60669, EN 55022/ EN 50081-1 and EN 55024/ EN 50082-1
Operating temperature	0° to +50°C/32° to +122°F		
Humidity (non-condensing)	Max. 85%		


SUPPLY SPECIFICATIONS

Power Supply	
Rated operational voltage	230 VAC $\pm 10\%$
Power consumption	12 VA
Power dissipation	Max. 3.5 W
Frequency	50/60 Hz

WIRING DIAGRAM

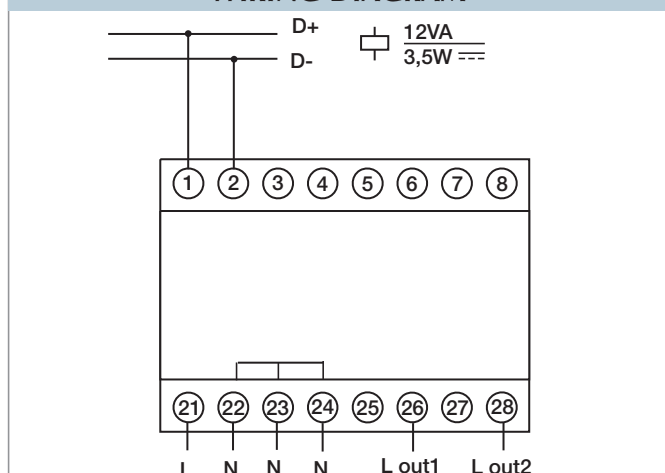

DIMENSIONS (mm)

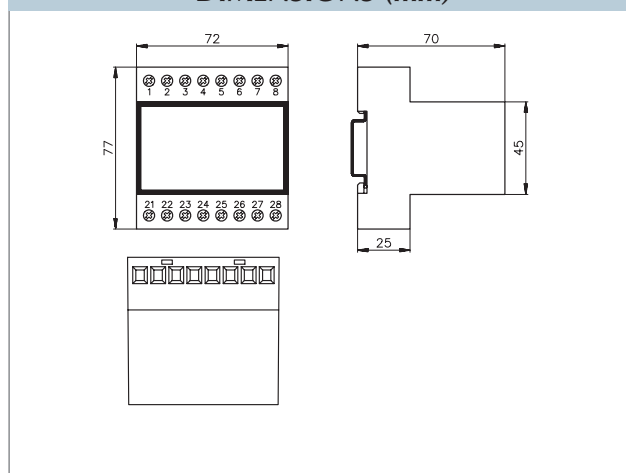

Dimmer, 2 x 230 W Output



MODE OF OPERATION

Coding

With the BGP-COD-BAT programming unit, each switching channel can be assigned any address between A1 and P8 via the modular socket on the front of the dimmer. The allocation of the channels is as follows:



Turn to the right:

Factory settings.

Negative phase angle control (Halogen lamps with electronic transformer), or ordinary ohmic load.

(Negative edge triggered).

Although an incorrect setting will result in malfunction, it will not cause irreparable damage to the dimmer. The following table shows the allocation of terminals:

Terminal	Description
1	smart-house signal conductor + (D +)
2	smart-house signal conductor - (D -)
21	Line in
22/23/24	N-conductor
26	Line out - Dimming channel 1
28	Line out - Dimming channel 2

Connections between the smart-house signal and to earth potential will cause malfunctions and are not permissible. Attention should be paid to the correct polarity of the supply voltage and the smart-house signal. In order to meet the requirements for protective low voltage, VDE 0100, part 410, should be observed and applied during installation.

LED indicators

Front-mounted LEDs indicate the status of the device:

LED	Description
GREEN	Supply ON
YEL-LOW "Bus OK"	smart-house carrier: OFF: Bus fault ON: Bus is OK
RED Fault	Monitoring: OFF: Status OK ON, flashing slowly: Overload ON, flashing fast: Short circuit
RED Output 1	Dimmer 1: OFF: Dimmer output off ON: Dimmer output on
RED Output 2	Dimmer 2: OFF: Dimmer output off ON: Dimmer output on

Putting into service

Commissioning must only be carried out by an authorised, trained technician. Observe the connection diagram when installing. All lines to be connected must be dead. The N-connection is absolutely necessary for the operation of the dimmer. The desired operating mode should be selected before connecting the phase, because the switches are disabled during operation as a safeguard against accidental resetting.



Turn to the left:

Positive phase angle control for inductive loads (Halo- gen lamps with conventional (threaded) transformer).
(Positive edge triggered).

Channel combinations and scenes

Channel combinations (Dim. 1 / Dim. 2)			Activation	
1 / 5	2 / 6	3 / 7	Short	Long
			ON / OFF	Dimming Up/Down 5%..100%
			Light scene 1 (40%)	Store light. scene 1
			Light scene 2 (80%)	Store light. scene 2
			Light scene 3 (20%)	Store light. scene 3
			Light scene 4 (60%)	Store light. scene 4
			100%	Lock /Unlock (Locked)
			0% / OFF	Set light scenes back to factory settings

TYPE SELECTION

Supply
230 VAC

Ordering no.
BH4-D230W2-230